



RPS

不鏽鋼離心泵

STAINLESS STEEL

CENTRIFUGAL PUMP


▲ RPS-20L



應用：冷凍設備、洗碗設備、醫療清洗、水處理設備、管道增壓、洗衣籠設備等。

材質：不含顆粒、纖維的水、乙二醇、酒精等液體。

Application Area: Chiller, Dish washing equipment, Medical cleaning, Water treatment equipment, Pipeline pressurization.

Circulation Medium: Water, ethylene glycol, alcohol and other liquids without particles and fibers.

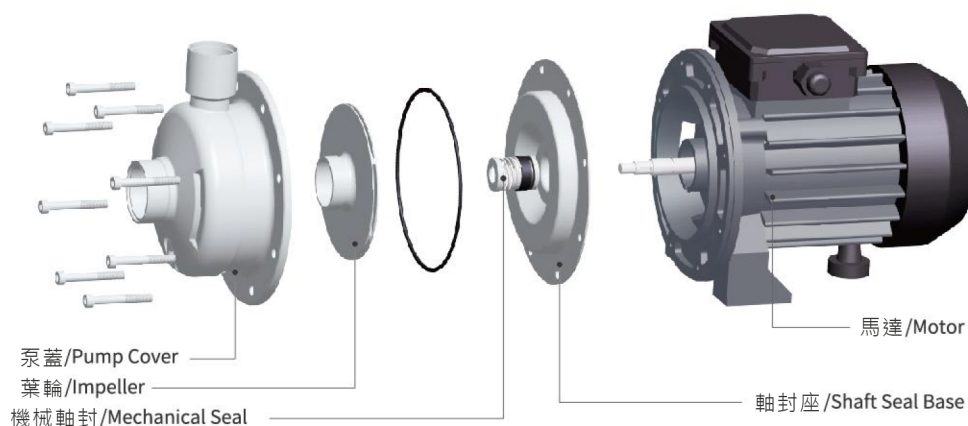

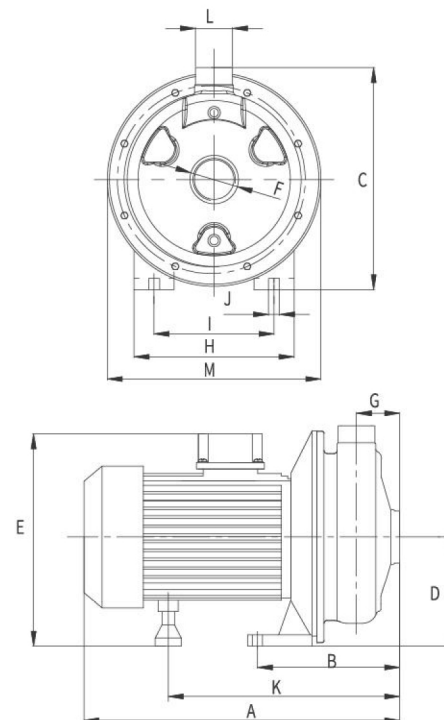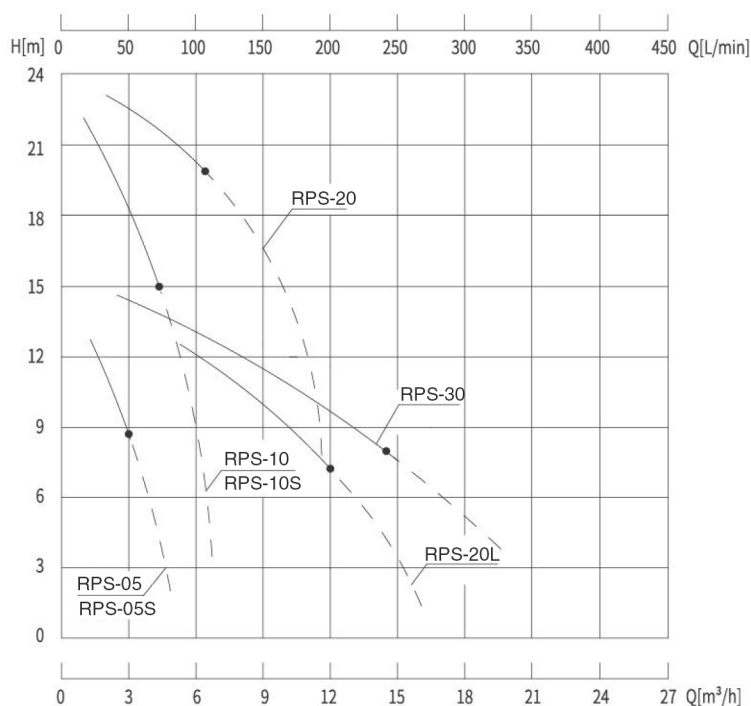

使用條件 / Working Condition

高溫熱水 Thermal Conductivity Water	乙二醇 Ethylene glycol	工作環境溫度 Working Temperature	最高海拔 Maximum Elevation	最大工作壓力 Maximum Working Pressure
+5°C~+90°C	-20°C~+90°C	-5°C~+40°C	1000m	8bar

規格性能參數 / Technical Parameter

型號/Model	口徑/Diameter		馬達/Motor					性能參數/Performance Parameter		泵浦淨重 Pump Weight (kg)
	入口 Inlet	出口 Outlet	功率 Power (kW)	馬力 (Hp)	電壓 Voltage (V)	頻率 Frequency (Hz)	轉速 Speed (r/min)	最高揚程 Max Head (m)	最大/使用流量 Max/Use Flow Rate (l/min)	
RPS-05 RPS-05S	G1.2"	G1"	0.37	0.5	3Ø-380 1Ø-220	50	2760	15	75 / 50	7.5
RPS-10 RPS-10S	G1.2"	G1"	0.75	1	3Ø-380 1Ø-220	50	2760	25	106 / 75	8.5
RPS-20 RPS-20L	G1.5"	G1"	1.5	2	3Ø-380	50	2760	26	180 / 115	14.5
	G2"	G2"	1.5	2	3Ø-380	50	2760	15	300 / 200	18
RPS-30	G2.5"	G2"	2.2	3	3Ø-380	50	2900	16	400 / 240	21.5

上述性能參數對應於水在20°C時以正常速度運輸，性能及參數誤差±10%。泵浦的性能隨輸送液體介質的比重及密度的不同而產生變化。

The above characteristic testing is based on the water transferring with the normal speed under 20 degrees, character's error is about 10%. The pump characters change according to the difference of the liquid mediums' proportion and density.

尺寸表 / Installation Size

型號/Model	A	B	C	D	E	F	G	H	I	J	K	L	M
RPS-05/RPS-05S	288	132	199	90	184	Ø46	52.5	132.5	100	Ø8	213	Ø37	Ø171
RPS-10/RPS-10S	315	137	222	110	214	Ø46	46	160	120	Ø11	233	Ø37	Ø213
RPS-20	357	133	223	110	233	Ø52	35	162	120	Ø11	250	Ø37	Ø213
RPS-20L	405	196.5	245	115	230	Ø65	84	180	140	Ø10	300	Ø65	Ø195
RPS-30	442	194.5	250	120	236	Ø80	87	175	140	Ø11	347.5	Ø65	Ø195