



















▲ RWD-20N

RWD


黃銅/不鏽鋼漩渦泵 COPPER / STAINLESS STEEL

VORTEX PUMP


應用:模具控溫、醫藥滅菌、反應釜夾套控溫、蒸氣鍋爐、焊機冷卻、試驗儀器、鍋爐補水、熱水爐、食品設備等。 **材質:**不含顆粒、纖維的水、乙二醇、酒精、導熱油、碳氫溶液、矽油等液體。


Application Area: Mold temperature controlling, Medical sterilization, Reaction kettle, Steam generator, Welder cooling, Testing instrument, Boiler feed water, Hot water furnace, Food equipment.

Circulation Medium: Water, ethylene glycol, alcohol, thermal oil, hydrocarbon solution, silicone oil and other liquids without particles and fibers.

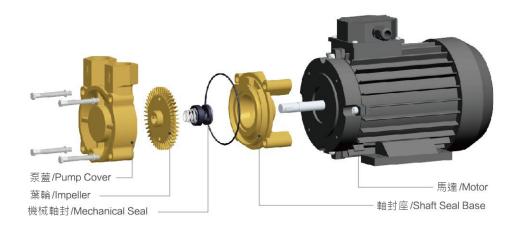



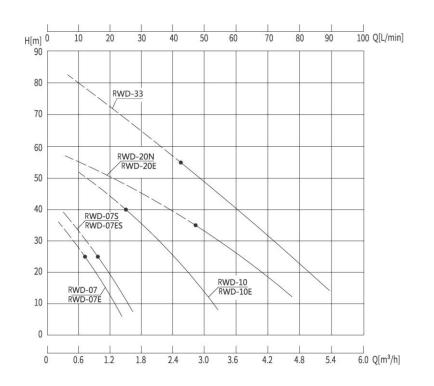

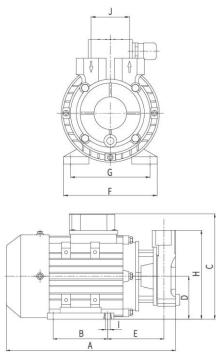

使用條件 / Working Condition

Thermal Conductivity vvaler	Thermal Conductivity Oil	Glyw/Sillwrie Oil	Working Temperature	IVIAXII TUITT Elevatioi I	Waxii Turri VVOI Kii ig Fressure
高溫熱水 Thermal Conductivity Water	高溫導熱油 Thermal Conductivity Oil	乙二醇/矽油	工作環境溫度 Working Temperature	最高海拔 Maximum Flavation	最大工作壓力 Maximum Working Pressure

規格性能參數 / Technical Parameter

	口徑/Dia	口徑/Diameter			馬達/Moto	r		性能參數/Performance Parameter		泵浦淨重	
型號/Model	入口 Inlet	出口 Outlet	功率 Power (KW)	馬力 (Hp)	電壓 Voltage (V)	頻率 Frequency (Hz)	轉速 Speed (r/min)	最高/使用揚程 Max/Use Head (m)	最大流量 Max Flow Rate (l/min)	Pump Weight (kg)	
RWD-07	G1/2"	G1/2"	0.55	0.7	3Ø-380	50	2760	40/25	25	6.5	
RWD-07S	G1/2"	G1/2"	0.55	0.7	1Ø-220	50	2760	45/25	30	10	
RWD-07E	G1/2"	G1/2"	0.55	0.7	3Ø-380	50	2760	40/25	25	6	
RWD-07ES	G1/2"	G1/2"	0.55	0.7	1Ø-220	50	2760	45/25	30	9	
RWD-10	G3/4"	G3/4"	0.75	1	3Ø-380	50	2760	60/40	60	11	
RWD-10E	DN20	DN20	0.75	1	3Ø-380	50	2760	60/40	60	11	
RWD-20N	DN20	DN20	1.5	2	3Ø-380	50	2760	60/35	90	16	
RWD-20E	G3/4"	G3/4"	1.5	2	3Ø-380	50	2760	60/35	90	15	
RWD-33	DN25	DN25	2.5	3.3	3Ø-380	50	2760	85/55	108	26	

上述性能參數對應於水在20°C時以正常速度運輸,性能及參數誤差±10%。泵浦的性能隨輸送流體介質的比重及密度的不同而產生變化。
The above characteristic testing is based on the water transferring with the normal speed under 20 degrees. character'serror is about 10%. The pump characters change according to the difference of the liquid mediums' proportion and density.

E 代表不鏽鋼泵體。 The letter "E" means stainless steel pump body.

尺寸表 / Installation Size

型號/Model	Α	В	С	D	E	F	G	Н	ı	J
RWD-07	237	80	160	63	75	125	100	119	4-Ø8	35
RWD-07S	265	90	175	71	83	132	112	127	4-Ø8	35
RWD-07E	237	80	160	63	75	125	100	119	4-Ø8	35
RWD-07ES	265	90	175	71	83	132	112	127	4-Ø8	35
RWD-10	285	90	175	71	92	132	112	147	4-Ø8	55
RWD-10E	293	90	175	71	90	132	112	148	4-Ø8	55
RWD-20N	315	100	193	80	92.5	153	125	202	4-Ø10	55
RWD-20E	315	100	193	80	92.5	153	125	202	4-Ø10	55
RWD-33	400	125	210	90	138	170	140	223	4-Ø10	60